

SOLIS

The source of Protection...
Combining all the fundamentals of top of the range protection, Solis offers an ultra-wraparound style with the benefits of development of ultra-modern materials.



Supplied with microfibre pouch



SOLICONT



SOLIPOL




SOLIFLASH



SOLIPSF

Coatings anti-scratch, anti-fog, anti-static (according to versions)

Non-slip bridge

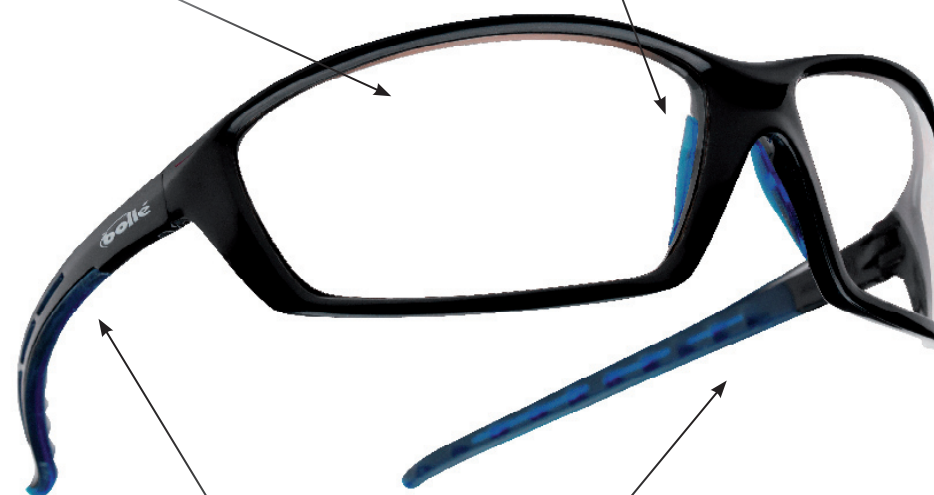






























25 g

Non-slip TIPGRIP temples

Europe Bolle Safety
95 Rue Louis Guérin
69100 Villeurbanne - France
tel: 00 33 (0) 4 78 85 23 64
fax: 00 33 (0) 4 78 85 28 56
contact@bolle-safety.com

U.K. Bolle Safety
Unit C83 - Barwell Business Park
Leatherhead Road - Chessington
Surrey - KT9 2NY
tel. 00 44 (0)208 391 4700
fax 00 44 (0)208 391 4733
e-mail : sales@bolle-safety.co.uk

STANDARDS MARKING :

Products ref.	LENSES													FRAMES											
	Risks relating to radiations 	Bolle Protection logo	Optical quality			Mechanical Risks 				Electrical Risks 	Thermal Risks 	Coatings (Optional marking K: anti-scratch N: anti-fog)		CE logo	Bolle Protection logo	Standards	Chemical Risks 			Electrical Risks 	Mechanical Risks 			Thermal Risks 	CE logo
			EN 172 - Solar (100% UV)	Permanent wear	Intermittent wear	Short period	Low energy impact 45 m/s	Medium energy impact 120 m/s	High energy impact 190 m/s	Extremes of temperature impact	Electric arc short circuiting	Molten metals and hot solids	anti-scratch				anti-fog	Liquid drops	Large dust particles > 5 microns	Gas and fine dust particles < 5 microns	Electric arc short circuiting	Low energy impact 45 m/s	Medium energy impact 120 m/s	High energy impact 190 m/s	
SOLICONT	5-1,4/1,1		1		F	N/A	N/A	T	N/A	N/A					EN 166	N/A	N/A	N/A	N/A	F	N/A	N/A	T	N/A	
SOLIPOL	5-3,1		1		F	N/A	N/A	T	N/A	N/A					EN 166	N/A	N/A	N/A	N/A	F	N/A	N/A	T	N/A	
SOLIFLASH	5-3,1		1		F	N/A	N/A	T	N/A	N/A					EN 166	N/A	N/A	N/A	N/A	F	N/A	N/A	T	N/A	
SOLIPSF	5-3,1		1		F	N/A	N/A	T	N/A	N/A					EN 166	N/A	N/A	N/A	N/A	F	N/A	N/A	T	N/A	

N/A: Non applicable

SOLICONT



SOLIPSF

SOLIFLASH



SOLIPOL

CHARACTERISTICS :

Lenses	PC - 2,2 mm - Curve 8
Frame	Nylon
Temples	PC + TPR
Strap	Non applicable
Foam	Non applicable
Spare lenses	No

PACKAGING AND EAN 13 CODE :

	SOLICONT	SOLIPSF	SOLIFLASH	SOLIPOL
→ individual plastic bag	3660740003579	3660740003586	3660740003593	3660740003722
→ 10 safety spectacles per box	3660740103576	3660740103583	3660740103590	3660740103729
→ 240 safety spectacles per outer pack	3660740203573	3660740203580	3660740203597	3660740203726

Notified laboratories for certification :

