

RUSH+



FRAME
+ UPPER PROTECTION
+ NON-SLIP NOSE BRIDGE
+ SINGLE-LENS FRAME

TEMPLES
+ BI-MATERIAL TEMPLES FOR BETTER COMFORT
+ GASKET AND STRAP KIT (OPTION)

LENS
+ **PLATINUM**® ASAF COATING
+ PANORAMIC FIELD OF VISION

VERSIONS



CLEAR
#PSSRUSP064B



SMOKE
#PSSRUSP443B



CSP
#PSSRUSPC13B



STRAP & GASKET
#1662320



+ MICROFIBER POUCH INCLUDED


DESCRIPTION

Sporty, RUSH+ provides a panoramic field of vision and offers an attractive design thanks to its flexible co-injected temples. Also ultra-light, RUSH+ ensures perfect optical quality and ultimate comfort.







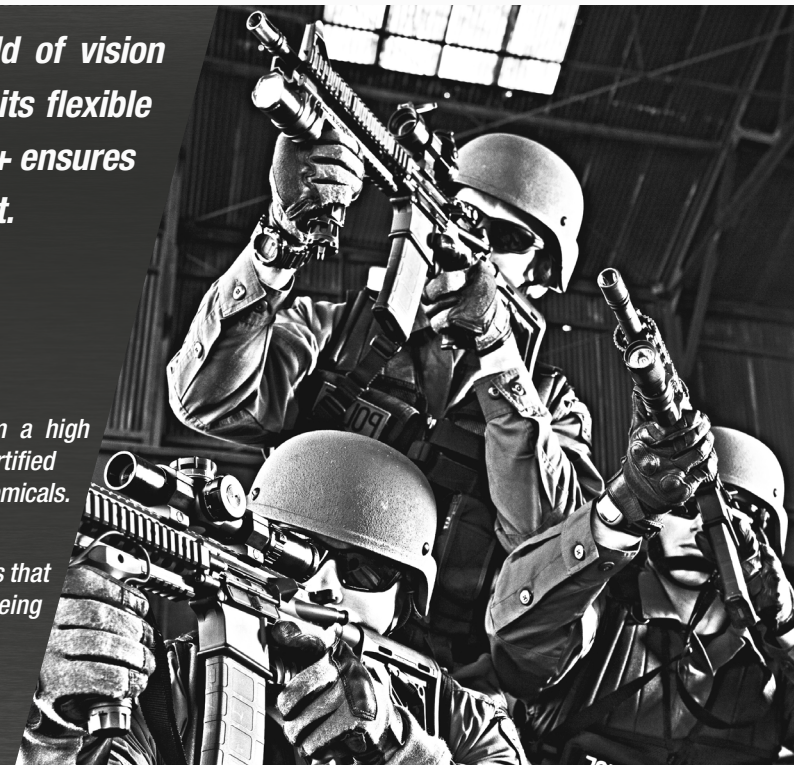


TECHNOLOGIES

PLATINUM® (P) ASAF Coating
Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® is resistant to the most aggressive chemicals.


CSP
This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments.



RUSH+

MODEL	FRAME	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
RUSH+	■ Black	 Clear	PSSRUSP064B	 IO	AS/NZS 1337.1	784.8 km/h - 218.2 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF 
		 Smoke	PSSRUSP443B	 I3	AS/NZS 1337.1	774km/h - 215.9 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF 
		 CSP	PSSRUSPC13B	 I1	AS/NZS 1337.1	756km/h - 210.2 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF 
	Gasket & Strap Kit	-	1662320	-	-	-	-	-

Lens markings

 Platinum is a permanent coating applied on both sides of the lens that gives a high resistance to scratching (1.4 cd / m²) and to the most aggressive chemicals and delays the onset of fogging for two minutes, as per the testing requirements of EN166.

I. The letter 'I' signifies 'Medium Impact' approval.

O. The letter 'O' signifies that the product has been approved for the use both outdoors and indoors, and the terminology used by Australian standards is 'outdoor un-tinted'. This marking appears on all clear, amber and contrast lenses.

Ocular lens category:


0. Range of luminous transmittance 80-100%

1. Range of luminous transmittance 43 -88%

2. Range of luminous transmittance 18-43%

3. Range of luminous transmittance 8 -18%

Others symbols:

 Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

Frame markings

Standards :

AS/NZS 1337.1:2010 Tested and approved to AS/NZS 1337.1:2010 for medium impact protection. Resists a 6mm ball at 45 m/s.

Others symbols:

CE European standard  Manufacturer name

	PSSRUSP064B	PSSRUSP443B	PSSRUSPC13B	1662320
EAN13 Unit pack	3 660 740 012 458	3 660 740 012 465	3 660 740 012 472	9318330002047
EAN13 Inner pack (number of unit per inner pack)	-	-	-	09318330002047 (20 units)
EAN13 Carton (number of unit per master pack)	3 660 740 212 452 (125 units)	3 660 740 212 469 (125 units)	3 660 740 212 476 (125 units)	931833000200947 (240 units)

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfibre pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

RUSH+	
Lens	PC - 2.3 mm - Curve 9
Temples	PC + TPR
Strap	Nylon - 15mm
Gasket	SBR + Nylon
Spare lens	No
Country of Origin	Taiwan

For more information on this product and the BSSI range, visit:

bolle-safety.com

BOLLÉ SAFETY / APAC
32-40 Fairchild Street
Heatherton VIC 3202
AUSTRALIA