

# SWAT

**LENS**  
+ 'PLATINUM' ASAF COATING



**TEMPLES**  
+ NON-SLIP TEMPLES  
+ INTEGRATED LATERAL PROTECTION  
+ COMFORT BI-MATERIAL

**BRIDGE**  
+ NON-SLIP BRIDGE



**SMOKE**  
#SWATPSF



**POLARIZED**  
#SWATPOL

28 g

+ MICROFIBER POUCH AND INDIVIDUAL SOFT CARRY CASE INCLUDED


*MIL-PRF-31013 ANSI 287.1-2010 certified, these SWAT ballistic protection sunglasses ensure maximum protection against any event. Thanks to its non-slip bridge, flexible temples and ultra enveloping design, SWAT will provide you with comfort and protection. SWAT is available in smoke 'PLATINUM' and POLARIZED version.*

#### PIATINUM ('P') ASAF Coating

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.

#### POLARIZED

A technology approved for permanent wear and certified with perfect optical quality, it offers unbeatable comfort by filtering glare and reflections. Ideal for the maritime environment. Filters 99.99% of UVA/UVB.

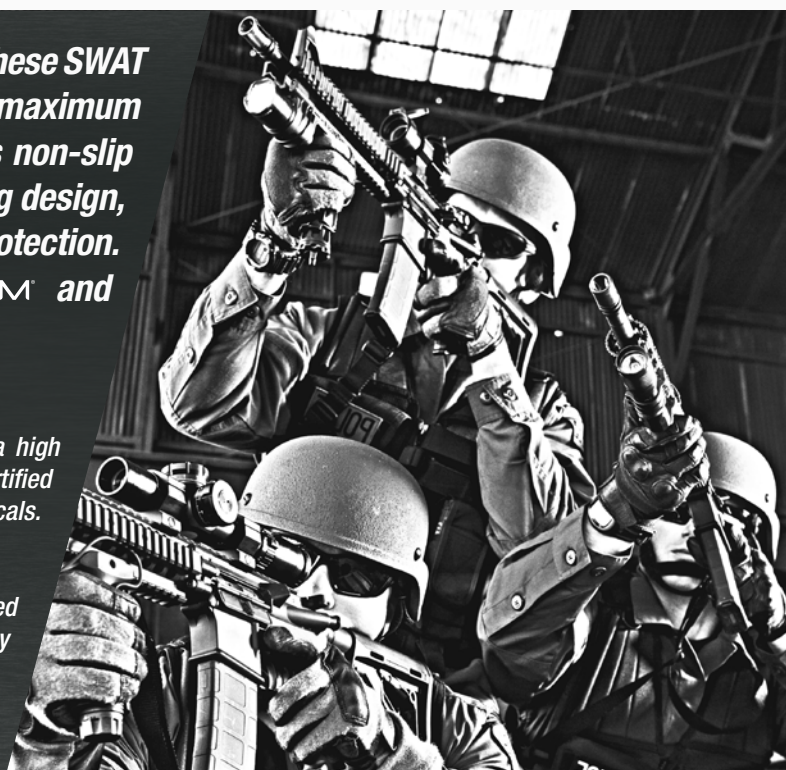

# SWAT



MODEL	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
<b>SWAT</b>	Smoke	SWATPSF	5-3.1  1 FT KN C€	EN166 FT C€	705 km/h - 196 m/s	ANSIZ87.1-2010 MIL-PRF-31013	ASAF
	POLARIZED	SWATPOL	5-3.1  1 FT C€	EN166 FT C€	659 km/h - 183 m/s	ANSIZ87.1-2010 MIL-PRF-31013	AS/AF

## Lens markings

### Optical class symbols:

1. Continuous work

### Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

### Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

C€ European standard Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

## Frame markings

### Standards :

**EN166.** guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

### Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

### Others symbols:

C€ European standard Manufacturer name

	SWATPSF	SWATPOL
<b>EAN13 Unit pack</b>	3660740000677	3660740000691
<b>EAN13 Inner pack</b> (number of unit per inner pack)	-	-
<b>Size // Weight</b> Inner pack	-	-
<b>EAN13 Carton</b> (number of unit per master pack)	3660740200671 (95 units)	3660740200695 (95 units)
<b>Size // Weight</b> Master pack	60x50x40 cm 13.5 kg	60x50x40 cm 13.5 kg

*Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.*

*Storage: All products must be stored in a dry and clean environment.*

SWAT	
<b>Lens</b>	PC - 2.2 mm - Curve 8
<b>Temples</b>	Nylon + PVC
<b>Frame</b>	Nylon
<b>Spare lens</b>	-
<b>Country of origin</b>	Taiwan



For more information on this product and the BSSI range, visit:

**bolle-safety.com**

BOLLÉ SAFETY / APAC  
32-40 Fairchild Street  
Heatherton VIC 3202  
AUSTRALIA