

TRYON

FRAME

- + WRAP-AROUND
- + ADJUSTABLE FLEX NOSE BRIDGE
- + SINGLE-LENS FRAME



TEMPLES

- + BI-MATERIAL PC/TPR
- + FLEX 160° TEMPLES
- + STRAP KIT (OPTION)

LENS

- + 'PLATINUM' ASAF COATING
- + WIDE FIELD OF VISION

VERSIONS



SMOKE
#PSSTRY0443B



CSP
#PSSTRY0C13B



POLARIZED
#PSSTRY0P11B



STRAP
#PSPUNISS01



26 g

+ MICROFIBER POUCH INCLUDED

DESCRIPTION

Wrap-around equipped with co-injected FLEX160° temples, an adjustable nose bridge, and our exclusive PLATINUM® ASAF coating... TRYON perfectly combines innovation and absolute protection.


TECHNOLOGIES







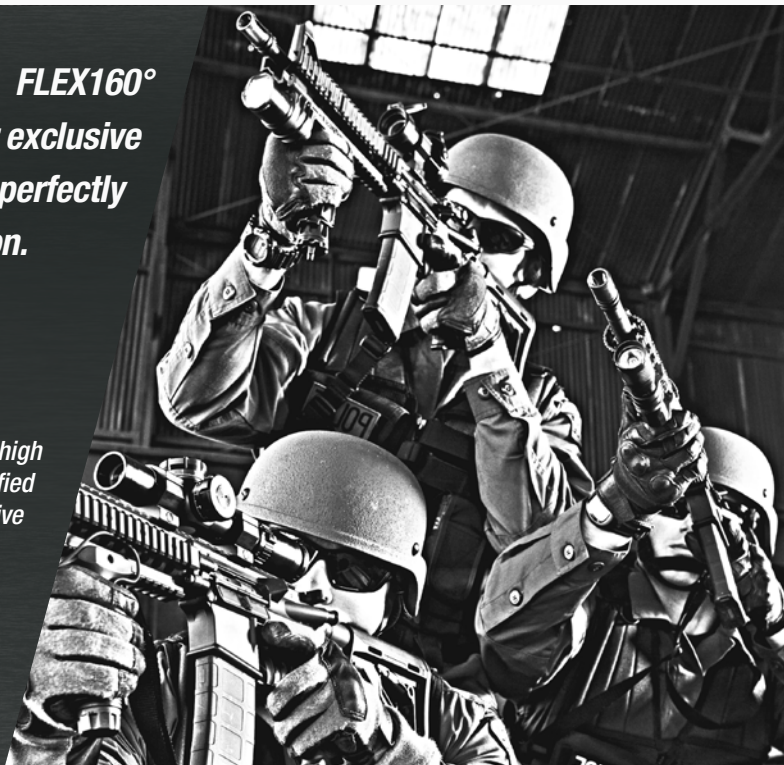

'PLATINUM' (P) ASAF Coating

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® is resistant to the most aggressive chemicals.


CSP

This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments.



MODEL	FRAME	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
TRYON	■ Matte black	 Smoke	PSSTRYO443B	 I3	AS/NZS 1337.1	777.6 km/h - 216.8 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF 
	■ Matte black	 CSP	PSSTRYOC13B	 I1	AS/NZS 1337.1	792 km/h - 220 m/s	ANSI Z87.1	ASAF 
	■ Matte black	 Polarized	PSSTRYOP11B	 I3	AS/NZS 1337.1	837.3 km/h - 232.6 m/s	ANSI Z87.1	AS
	Strap Kit	-	PSPUNISS01	-	-	-	-	-

Lens markings

 Platinum is a permanent coating applied on both sides of the lens that gives a high resistance to scratching (1.4 cd / m²) and to the most aggressive chemicals and delays the onset of fogging for two minutes, as per the testing requirements of EN166.

I. The letter 'I' signifies 'Medium Impact' approval.

O. The letter 'O' signifies that the product has been approved for the use both outdoors and indoors, and the terminology used by Australian standards is 'outdoor un-tinted'. This marking appears on all clear, amber and contrast lenses.

Ocular lens category:

0. Range of luminous transmittance 80-100%

1. Range of luminous transmittance 43 -88%

2. Range of luminous transmittance 18-43%

3. Range of luminous transmittance 8 -18%

Others symbols:

 Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

Frame markings

Standards :

AS/NZS 1337.1:2010 Tested and approved to AS/NZS 1337.1:2010 for medium impact protection. Resists a 6mm ball at 45 m/s.

Others symbols:

 European standard  Manufacturer name

	PSSTRYO443B	PSSTRYOC13B	PSSTRYOP11B	PSPUNISS01
EAN13 Unit pack	3 660 740 012 564	3 660 740 012 557	3 660 740 012 571	3660740011970
EAN13 Inner pack (number of unit per inner pack)	-	-	-	3660740111977 (40 units)
EAN13 Carton (number of unit per master pack)	3 660 740 212 568 (125 units)	3 660 740 212 551 (125 units)	3 660 740 212 575 (125 units)	3660740211974 (480 units)

*Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfibre pouch or rigid case.
Storage: All products must be stored in a dry and clean environment.*

TRYON	
Lens	PC - 2.2 mm - Curve 8
Temples	PC + TPR
Strap	Nylon - 15mm
Frame	PC + TPR
Spare lens	No
Country of origin	Taiwan



For more information on this product and the BSSI range, visit:

bolle-safety.com

BOLLÉ SAFETY / APAC
32-40 Fairchild Street
Heatherton VIC 3202
AUSTRALIA