

TRYON

FRAME

- + WRAP-AROUND
- + ADJUSTABLE FLEX NOSE BRIDGE
- + SINGLE-LENS FRAME



TEMPLES

- + BI-MATERIAL PC/TPR
- + FLEX 160° TEMPLES
- + STRAP KIT (OPTION)

LENS

- + PLATINUM® ASAF COATING
- + WIDE FIELD OF VISION



SMOKE
#PSSTRY0443B



CSP
#PSSTRY0C13B



POLARIZED
#PSSTRY0P11B



STRAP
#RUSHKITS



26 g

+ MICROFIBER POUCH INCLUDED


Wrap-around equipped with co-injected FLEX160° temples, an adjustable nose bridge, and our exclusive PLATINUM® ASAF coating...TRYON perfectly combines innovation and absolute protection.












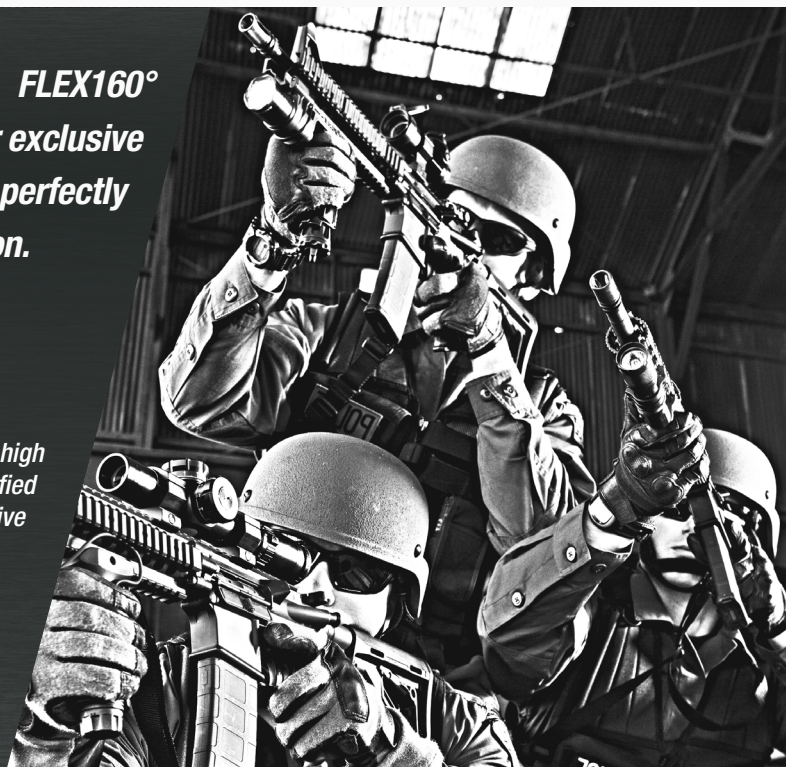


PLATINUM® (P) ASAF Coating

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.

CSP

This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments.



MODEL	FRAME	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
TRYON	■ Matte black	 Smoke	PSSTRYO443B	5-3.1  1 FT KN  €€	 EN166 FT €€	777.6 km/h - 216.8 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF 
	■ Matte black	 CSP	PSSTRYOC13B	5-1.4  1 FT KN  €€	 EN166 FT €€	792 km/h - 220 m/s	ANSI Z87.1	ASAF 
	■ Matte black	 Polarized	PSSTRYOP11B	5-3.1  1 FT  €€	 EN166 FT €€	837.3 km/h - 232.6 m/s	ANSI Z87.1	AS
	Strap Kit	-	RUSHKITS	-	-	-	-	-

Lens markings

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

€€ European standard  Manufacturer name

Frame markings

Standards :

EN166. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

€€ European standard  Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

	PSSTRYO443B	PSSTRYOC13B	PSSTRYOP11B	RUSHKITS
EAN13 Unit pack	3 660 740 012 564	3 660 740 012 557	3 660 740 012 571	3660740007546
EAN13 Inner pack (number of unit per inner pack)	-	-	-	3660740107543 (40 units)
EAN13 Carton (number of unit per master pack)	3 660 740 212 568 (125 units)	3 660 740 212 551 (125 units)	3 660 740 212 575 (125 units)	3660740207540 (480 units)

*Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.
Storage: All products must be stored in a dry and clean environment.*

TRYON	
Lens	PC - 2.2 mm - Curve 8
Temples	PC + TPR
Strap	Nylon - 15mm
Frame	PC + TPR
Spare lens	No
Country of origin	Taiwan



For more information on this product and the BSSI range, visit:

www.bollesafety-si.com

BOLLÉ SAFETY
34 rue de la Soie
69100, Villeurbanne
FRANCE