

SILIUM+

bolle
SAFETY
STANDARD ISSUE

FRAME
+ ULTRA LIGHT
+ NON-SLIP NOSE BRIDGE



TEMPLES
+ ULTRA THIN TEMPLES
+ FITS WITH OTHER PPE
+ ERGONOMICAL AND FLEXIBLE TEMPLES

LENS
+ PLATINUM® ASAF COATING
+ PANORAMIC FIELD OF VISION



CLEAR
#PSSSILI64



SMOKE
#PSSSILI443



CSP
#PSSSILIC13

0.74 oz

+ MICROFIBER POUCH INCLUDED


SILIUM+ is an ultra-light polycarbonate safety eyewear, that combines design, ergonomics, performance, and comfort for every situation, long term.

PLATINUM® (P) ASAF Coating

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.





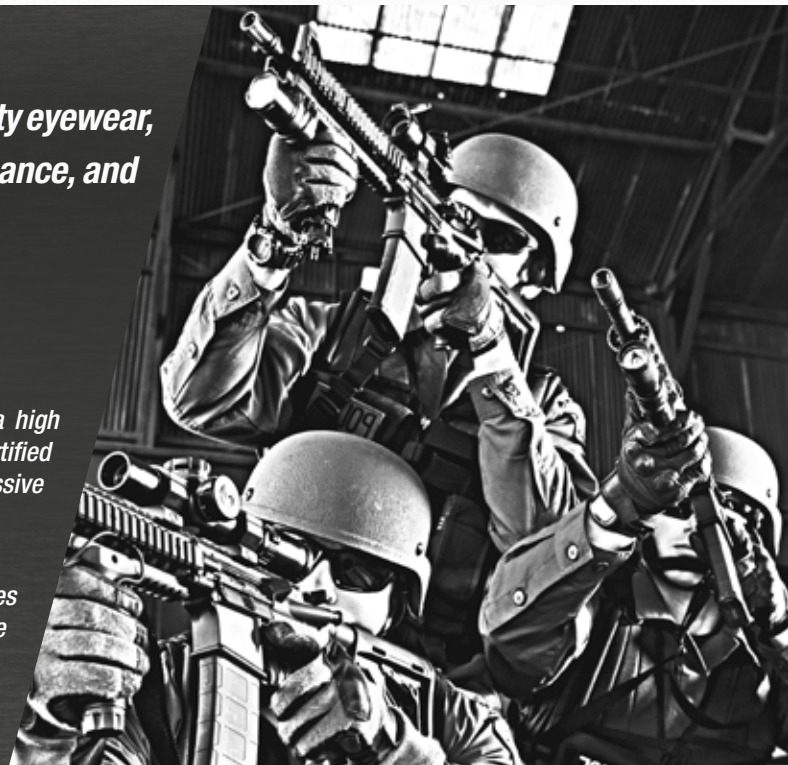







CSP

This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments.



SILIUM+

bolle
SAFETY
STANDARD ISSUE

MODEL	FRAME	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
SILIUM+	■ Matte Black	 Clear	PSSSILI64	 Z87+ U6	 Z87+	-	-	ASAF 
	■ Matte Black	 Smoke	PSSSILI443	 Z87+ U6S	 Z87+	-	-	ASAF 
	■ Matte Black	 CSP	PSSSILIC13	 Z87+ U6S	 Z87+	-	-	ASAF 

Lens markings

Z87+. Impact rated for Plano product - tested and approved to ANSI Z87.1-2010

 Manufacturer name

Lens Type:

Clear = none

Welding = W and Shade number from 1,3 to 14

UV filter = U and scale number from 2 to 6

Visible light filter = L and scale number from 1,3 to 10

IR filter = R and scale number from 1,3 to 10

Variable tint = V

Special purpose = S

Frame markings

 Manufacturer name

Country of Origin: P.R.C

Z87+. Impact rated for Plano product - tested and approved to ANSI Z87.1-2010

Mechanical strength symbols:

ANSI. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc. Maximum protection for glasses. Use for high speed particles at extreme temperatures.

Bollé Safety product approval certificates to ANSI standards will be sent on request.

	PSSSILI64	PSSSILI443	PSSSILIC13
EAN13 Unit pack	3660740011420	3660740011413	3660740011437
EAN13 Inner pack (number of unit per inner pack)	3660740111427 (10 units)	3660740111410 (10 units)	3660740111434 (10 units)
Size // Weight Inner pack	24x18x9 cm 0.6 kg	24x18x9 cm 0.6 kg	24x18x9 cm 0.6 kg
EAN13 Carton (number of unit per master pack)	3660740211424 (180 units)	3660740211417 (180 units)	3660740211431 (180 units)
Size // Weight Master pack	75x52x30 cm 11 kg	75x52x30 cm 11 kg	75x52x30 cm 11 kg

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

SILIUM+	
Lens	PC - 2.2 mm - Galbe 8
Temples	PC + TPE
Frame	PC
Spare lens	No
Country of Origin	P.R.C.



For more information on this product and the BSSI range, visit:

bollesafety-usa.com

BOLLÉ SAFETY

1896 Rutherford Rd
Carlsbad, CA 92008
USA