

SILIUM+

bolle
SAFETY



FRAME
+ ULTRA LIGHT
+ NON-SLIP NOSE BRIDGE



TEMPLES
+ ULTRA THIN TEMPLES
+ FITS WITH OTHER PPE
+ ERGONOMICAL AND FLEXIBLE TEMPLES

LENS
+ 'PLATINUM' ASAF COATING
+ PANORAMIC FIELD OF VISION



SMOKE
#PSSSILI443B



CSP
#PSSSILIC13B

21 g

+ MICROFIBER POUCH INCLUDED

VERSIONS

DESCRIPTION

SILIUM+ is an ultra-light safety eyewear in polycarbonate that combines design, ergonomics, performance and comfort for a use in every situation and on the long term.


'PLATINUM' (P) ASAF Coating

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® is resistant to the most aggressive chemicals.

CSP

This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments.

TECHNOLOGIES

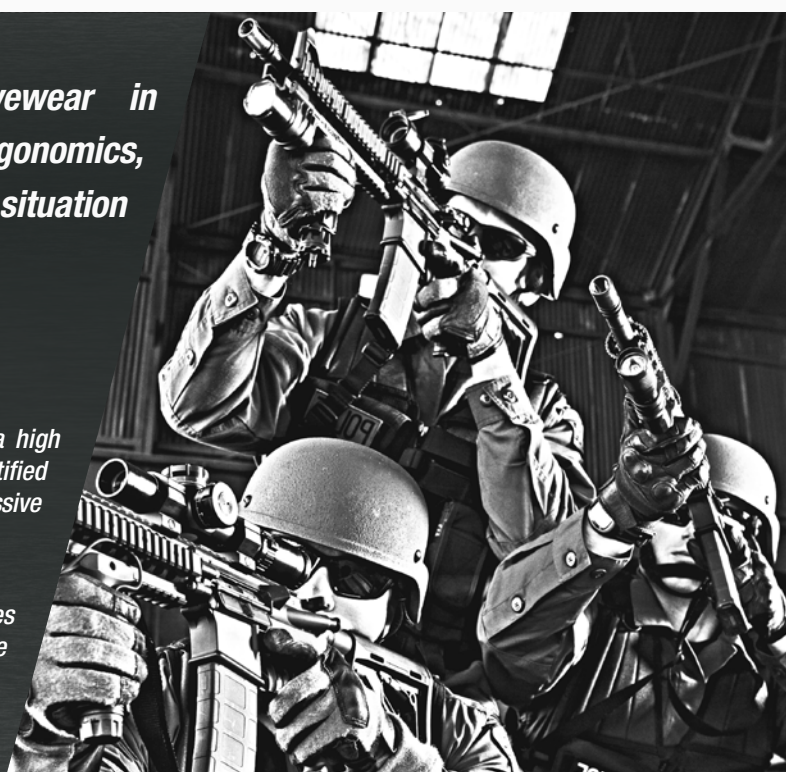

SILIUM+



MODEL	FRAME	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
SILIUM+	■ Matte Black	Smoke	PSSSILI443B	I3	AS/NZS 1337.1	745.2km/h - 207,4 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF
	■ Matte Black	CSP	PSSSILIC13B	I1	AS/NZS 1337.1	705.6km/h - 196,4 m/s	ANSI Z87.1	ASAF

Lens markings

. Platinum is a permanent coating applied on both sides of the lens that gives a high resistance to scratching (1.4 cd / m²) and to the most aggressive chemicals and delays the onset of fogging for two minutes, as per the testing requirements of EN166.

I. The letter 'I' signifies 'Medium Impact' approval.

O. The letter 'O' signifies that the product has been approved for the use both outdoors and indoors, and the terminology used by Australian standards is 'outdoor un-tinted'. This marking appears on all clear, amber and contrast lenses.

Ocular lens category:

0. Range of luminous transmittance 80-100%

1. Range of luminous transmittance 43 -88%

2. Range of luminous transmittance 18-43%

3. Range of luminous transmittance 8 -18%

Others symbols:

Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

Frame markings

Standards :

AS/NZS 1337.1:2010 Tested and approved to AS/NZS 1337.1:2010 for medium impact protection. Resists a 6mm ball at 45 m/s.

Others symbols:

CE European standard Manufacturer name

	PSSSILI443B	PSSSILIC13B
EAN13 Unit pack	3 660 740 012 519	3 660 740 012 526
EAN13 Carton (number of unit per master pack)	3 660 740 212 513 (135 units)	3 660 740 212 520 (135 units)
Size // Weight Master pack	60x50x37 cm 11.4 kg	60x50x37 cm 11.4 kg

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

SILIUM+	
Lens	PC - 2.2 mm - Galbe 8
Temples	PC + TPE
Frame	PC
Spare lens	No
Country of Origin	P.R.C.



For more information on this product and the BSSI range, visit:

bolle-safety.com

BOLLÉ SAFETY / APAC
32-40 Fairchild Street
Heatherton VIC 3202
AUSTRALIA