

# SWAT

## ballistic sunglasses

STANAG 2920, EN166, EN170 and EN172 certified, these SWAT ballistic protection sunglasses ensure maximum protection in all circumstances. Thanks to its flexible non-slip nylon temples, its bridge and its ultra wrap-around fit, SWAT provides you with comfort and protection. SWAT is available in **smoke**  **PLATINUM**, **silver mirror coated** and **polarized** versions.

**HIGHLY FLEXIBLE, COMFORTABLE NYLON FRAME**

**BALLISTIC POLYCARBONATE LENS**

 **PLATINUM COATING**

**ON SMOKE VERSION**

**NON-SLIP BRIDGE**


**INTEGRATED LATERAL PROTECTION**



**STANAG 2920**

 **PLATINUM**

The new exclusive **PLATINUM** coating guarantees even more safety, reliability and comfort. Washable (water and soap), this permanent coating applied on both sides of the lens makes it highly scratch resistant and durably delays the appearance of fogging.

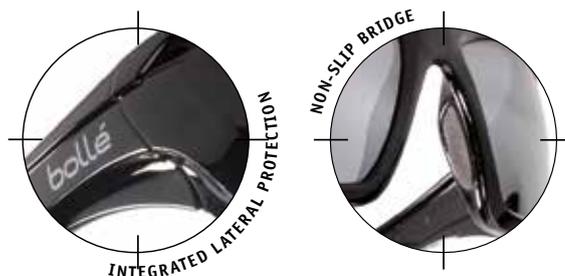

**VERSIONS AVAILABLE :**



SWATFLASH



SWATPSF




SWATPOL

**SUPPLIED WITH :**



Supplied with microfibre pouch and individual soft carry case



# SWAT

ballistic sunglasses

## markings / norms

Model	Reference	Version	Lens markings	Frame marking	V50 Ballistic Resistance STANAG 2920	ANSI/MIL	Coatings
SWAT	SWATPSF	 Smoke	5-3.1 ☞ 1 FT KN CE	☞ EN166 FT CE	705 km/h - 196 m/s	ANSIZ87.1-2010 MIL-PRF-31013	
	SWATFLASH	 Silver mirror-coated	5-3.1 ☞ 1 FT CE	☞ EN166 FT CE	655 km/h - 182 m/s	ANSIZ87.1-2010 MIL-PRF-31013	ASAF
	SWATPOL	 POLARIZED	5-3.1 ☞ 1 FT CE	☞ EN166 FT CE	659 km/h - 183 m/s	ANSIZ87.1-2010 MIL-PRF-31013	ASAF

### CHARACTERISTICS

#### LENS:

Ballistic PC lens - 2.2 mm - Base 8  
PLATINUM coating (on smoke version)  
Integrated lateral protection

### CHARACTERISTICS

#### TEMPLES:

Comfort nin-slip bi-material temples (Nylon + PVC)

FRAME: Available in mat black

WEIGHT: 28 g

**HIGH  
RESISTANCE**

## packaging and ean13 code :

Model	Reference	Unit	Inner box	Units	Outer box	Units
SWAT	SWATPSF	3660740000677	3660740100674	X	3660740200671	x 95
	SWATFLASH	3660740000684	3660740100681	X	3660740200688	x 95
	SWATPOL	3660740000691	3660740100681	X	3660740200695	x 95

### Notified laboratories for certification:



24/04/2019